



Air Lubricator

Features

- ▶▶ Heavy Duty Design
- ▶▶ Precise Regulating Lubrication
- ▶▶ Simple to Maintenance
- ▶▶ Easy Installation
- ▶▶ Type of Oil to be used ISO VG32

Technical Specification

Model	AL-S-02	AL-S-04	AL-S-05	AL-S-06	AL-S-07	AL-S-08
Size	1/4"	1/2"	3/4"	1"	1.1/2"	2"
Opr. Pressure	10 Kg/cm ² (max.)					
Temperature	50 °C (max.)					
Seals	NBR					
Media	Compressed air					

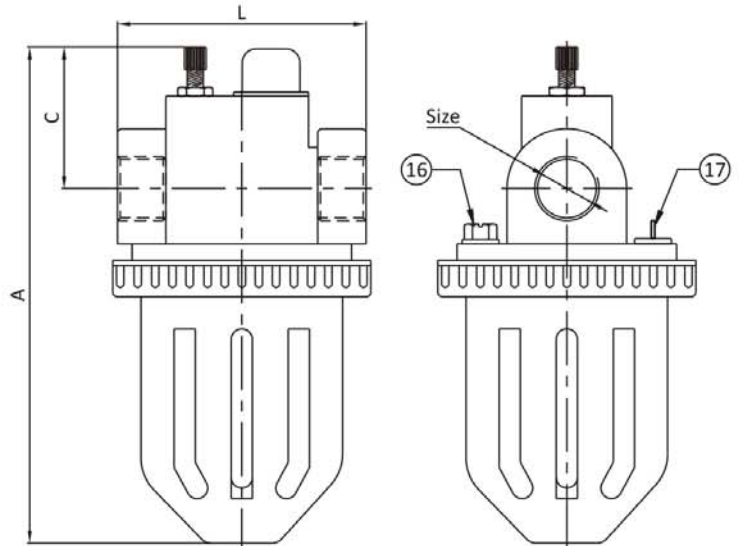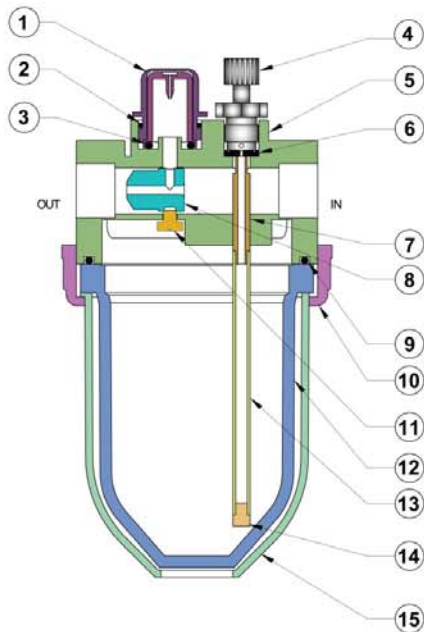

No.	Part Name	Material
1	Indicator Dom Set	Poly Carbonate
2	'O' Ring	NBR
3	'O' Ring	NBR
4	Oil Adjusting Assembly	Brass
5	Body	Aluminum Pressure Die Cast
6	Rubber Washer	NBR
7	Tube	Brass
8	Distributor	Polyacetal
9	'O' Ring	NBR
10	Ring	Aluminum Pressure Die Cast
11	Screw	Steel Plated
12	Bowl	Poly Carbonate
13	Oil Tube	P. U.
14	Filter Element	Sinter Bronze
15	Safety Guard	Nylon
16	Plug	Brass
17	Airvent	Brass

Dimensions :

(All Dimensions are in mm)

MODEL	SIZE	L	A	C	Flow Capacity ml	Flow SCFM at 5 Bar	Weight (Kg.) Approx.
AL - S - 02	1/4"	84	175	45	235	48	0.680
AL - S - 04	1/2"	84	175	45	235	95	0.610
AL - S - 05	3/4"	117.5	233	54	530	235	1.450
AL - S - 06	1"	117.5	233	54	530	290	1.400
AL - S - 07	1.1/2"	117.5	253	61	530	445	1.580
AL - S - 08	2"	117.5	253	61	530	445	1.630